


Solenoid directional valves type **DKE** and **DKER**

direct operated, ISO 4401 size 10

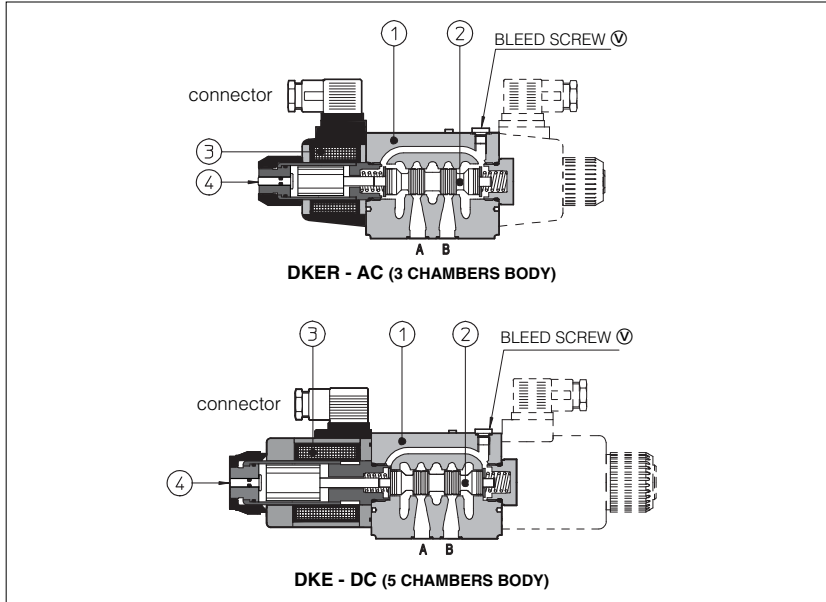

Spool type, direct operated solenoid valves available in two different versions:

DKE basic version equipped with standard solenoids

DKER high performance version equipped with improved force solenoids certified according to the North American standard **C UR US**

Configurations and construction

The valves are available in three or four way configurations and with two or three spool positions, see section 2. The spools 2 are interchangeable and they are available in a wide range of hydraulic configurations, see section 3.

The solenoids 3 have two different executions for AC or DC power supply and they are composed by:

- wet type screwed tube with integrated manual override pin 4 (the tube are different for AC and DC power supply).
- AC and DC coils see section 4

The coils are interchangeable for the same type of power supply AC or DC and they can be easily replaced without tools (they are not interchangeable between DKE and DKER)

The coils are fully encapsulated with the following temperature classes:

- class H for DC coils
- class F for AC coils

The valve body 1 is 5 chambers type, for all DC versions and for AC version with option /F*. Standard AC version use 3 chambers type body.

The optimized internal flow paths, largely cored with extrawide channels to the tank port, ensure low pressure drops.

Options

The following optional devices are available for DKE and DKER:

- prolonged manual override protected with rubber cap for easy hand operation
- control devices of the valve switching time
- spool position monitor devices for safety applications
- external drain port Y for high tank pressure (only DC version)

Surface mounting ISO 4401 size 10
Max flow up to 120 l/min
Max pressure: 315 bar

1 MODEL CODE

DKER - 1 63 1/2 /A - X 24 DC ** /*

Directional control valves ISO 4401 size 10
DKE = standard solenoids
DKER = high performances solenoids

Valve configuration, see section 2

61 = single solenoid, center plus external position, spring centered

63 = single solenoid, 2 external positions, spring offset

67 = single solenoid, center plus external position, spring offset

70 = double solenoid, 2 external positions, without springs

71 = double solenoid, 3 positions, spring centered

75 = double solenoid, 2 external positions, with detent

Other configurations are available on request.

Spool type, see section 3

Note: configuration 63, 70 and 75 are available only with spools type 0/2, 1/2 and 2/2.

Synthetic fluids
WG = water glycol
PE = phosphate ester

Series number

Voltage code, see section 4

00 = valve without coils

X = without connector

See note 2 at section 5 for available connectors,


to be ordered separately

Coils with special connectors, see note 3 at section 5 (only for DKER)

XJ = AMP junior Timer connector


Options, see note 1 at section 5

2 CONFIGURATION

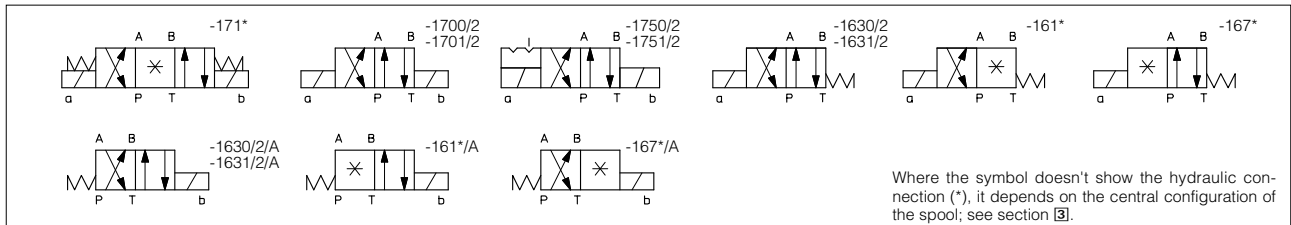

Where the symbol doesn't show the hydraulic connection (*), it depends on the central configuration of the spool; see section 3.

3 SPOOLS - for intermediate passages, see tab. E001.

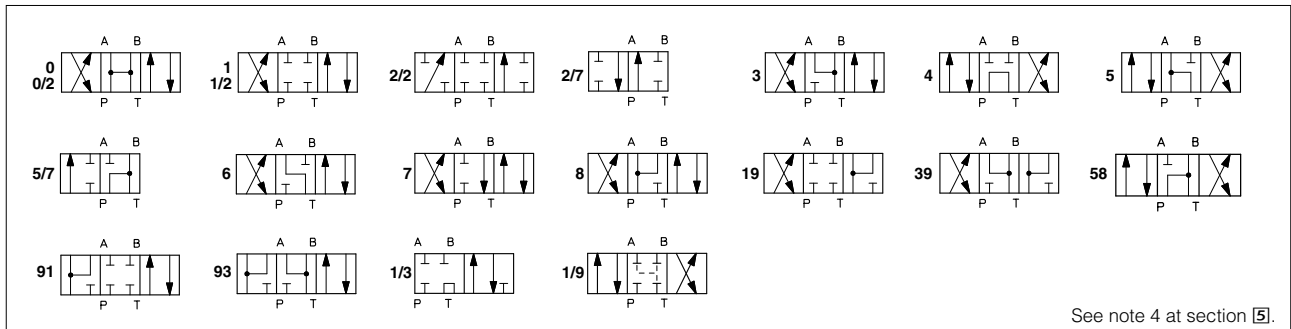

See note 4 at section 5.

4 MAIN CHARACTERISTICS OF DKE AND DKER DIRECTIONAL VALVES

| | | |
|---|--|---|
| Assembly position / location | Any position for all valves except for type - 170* (without springs) that must be installed with horizontal axis if operated by impulses | |
| Subplate surface finishing | Roughness index $\sqrt{0.4}$ flatness ratio 0,01/100 (ISO 1101) | |
| Ambient temperature | from -20°C to +70°C. | |
| Fluid | Hydraulic oil as per DIN 51524 535; for other fluids see section 11 | |
| Recommended viscosity | 15 ÷ 100 mm ² /s at 40°C (ISO VG 15 ÷ 100) | |
| Fluid contamination class | ISO 19/16, achieved with in line filters at 25 µm value to $\beta_{25} \geq 75$ (recommended) | |
| Fluid temperature | -20°C +60°C (standard and /WG seals) -20°C +80°C (/PE seals) | |
| Flow direction | As shown in the symbols of tables 2 and 3 | |
| Operating pressure For versions with proximity switches (/FC, /FI and /FIE versions) port Y must be drained | DKE | Ports P, A, B: 315 bar Port T: 120 bar for AC solenoids; 210 bar for DC solenoids; 250 bar for option /Y |
| | DKER | Ports P,A,B: 315 bar ; Port T: 160 bar for AC solenoid; 210 bar for DC solenoids; 250 bar for option /Y |
| Rated flow | See diagrams Q/Δp at section 7 | |
| Maximum flow | 120 l/min , see operating limits at section 8 | |

4.1 Coils characteristics

| | |
|-------------------------------|---|
| Insulation class | H (180°C) for DC coils F (155°C) for AC coils Due to the occurring surface temperatures of the solenoid coils, the European standards EN563 and EN982 must be taken into account |
| Connector protection degree | IP 65 |
| Relative duty factor | 100% |
| Supply voltage and frequency | See electric feature 6 |
| Supply voltage tolerance | ± 10% |
| Certification (only for DKER) | C UR US |

5 NOTES

1 Options

A = Solenoid mounted at side of port B (only for single solenoid valves). In standard versions, solenoid is mounted at side of port A.

WP = prolonged manual override protected by rubber cap - see section 13.

L, L1, L2, L3, LR, see section 11 = device for switching time control (only for DC solenoids).

F* = 5 chambers body for DC and AC versions with proximity switch for spool position monitoring; see tab. E110.

Y = external drain, only for DC version, to be selected if the pressure at T port is higher than the max allowed limits.

2 Type of electric connectors DIN 43650, to be ordered separately - see section 14.

SP-666 = standard connector IP-65 for direct connection to electric supply source.

SP-667 = as SP-666, but with built-in signal led.

SP-669 = with built-in rectifier bridge for supplying DC coils by alternate current (AC 110V and 230V - I_{max} 1A).

3 Coils with special connectors (only for DKER)

Coils type CAERJ with AMP Junior Timer connector (IP67) are available for voltage supply 12 and 24 V_{dc}

4 Spools

- spools type **0/2, 1/2, 2/2** are only used for two position valves: single solenoid valves, type DKE*-163*/2; double solenoid valves type DKE*-170*/2 and DKE*-175*/2.
- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1** is also available as **1/1**, properly shaped to reduce the water-hammer shocks during the switching.
- spool type **1/3** (only for DC version) is particularly used as shut-off valve for safety applications, consult our technical office.
- spool type **1/9** has closed center in rest position but it avoids the pressurization of A and B ports due to the internal leakages.
- other types of spools can be supplied on request.

6 ELECTRIC FEATURES

| External supply nominal voltage ± 10% | Voltage code | Type of connector | Power consumption (2) | Code of spare coil | |
|---------------------------------------|---------------------|------------------------|-------------------------------------|------------------------|-------------------------|
| | | | | DKE | DKER |
| 12 DC | 12 DC | SP-666 or SP-667 | 36 W (DKE) 39 W (DKER) | SP-CAE-12DC | SP-CAER-12DC |
| 24 DC | 24 DC | | | SP-CAE-24DC | SP-CAER-24DC |
| 110 DC | 110 DC | | | SP-CAE-110DC | SP-CAER-110DC |
| 220 DC | 220 DC | | | SP-CAE-220DC | SP-CAER-220DC |
| 110/50/60 AC | 110/50/60 AC | SP-669 | 85 VA (DKE) 105 VA (DKER) (3) | SP-CAE-110/50/60AC (1) | SP-CAER-110/50/60AC (1) |
| 230/50/60 AC | 230/50/60 AC | | | SP-CAE-230/50/60AC (1) | SP-CAER-230/50/60AC (1) |
| 110/50/60 AC | 110/50/60 AC | SP-669 | 36 W (DKE) 39 W (DKER) | SP-CAE-110DC | SP-CAER-110DC |
| 230/50/60 AC | 230/50/60 AC | | | SP-CAE-220DC | SP-CAER-220DC |


(1) In case of 60 Hz voltage frequency the performances are reduced by 10÷15% and the power consumption is 80 VA for DKE and 90 VA for DKER.

(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current. Inrush current values correspond to a power consumption of about 280 VA for DKE and 320 VA for DKER.


7 Q/ΔP DIAGRAMS based on mineral oil ISO VG 46 at 50°C

| Flow direction Spool type | P→A | | P→B | | A→T | | B→T | | P→T | | B→A | |
|------------------------------|-----|---|-----|---|-----|--|-----|--|-----|--|-----|---|
| | | | | | | | | | | | | |
| 0, 0/1, 0/2, 2/2 | A | A | B | B | | | | | | | | |
| 1, 1/1, 1/3, 6, 8 | A | A | D | C | | | | | | | | |
| 3, 3/1, 7 | A | A | C | D | | | | | | | | |
| 4 | B | B | B | B | F | | | | | | | |
| 5 | A | B | C | C | G | | | | | | | |
| 1/2 | B | C | C | B | | | | | | | | |
| 2/7 | D | | | F | | | | | | | | |
| 5/7 | B | | | A | E | | | | | | | |
| 19 | A | D | C | | | | | | | | | H |

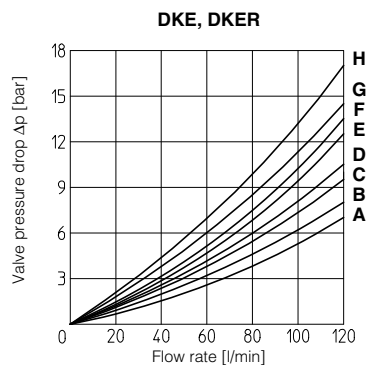

8 OPERATING LIMITS based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ($V_{nom} - 10\%$). The curves refer to application with symmetrical flow through the valve (i.e. P→A and B→T). In case of asymmetric flow and if the valves have the devices for controlling the switching times the operating limits must be reduced.

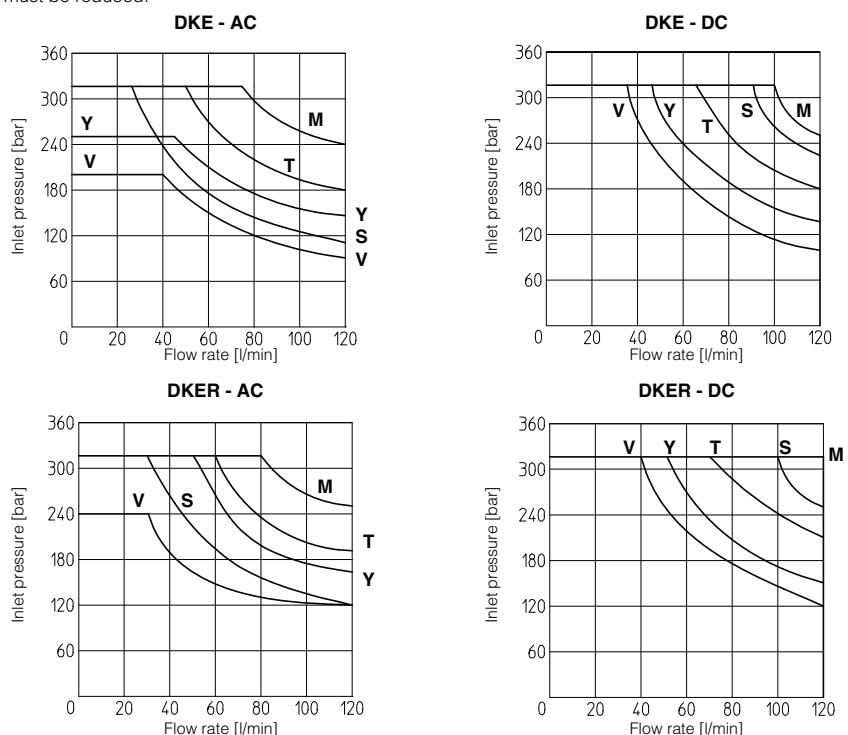

| Curve | Spool type | |
|-------|----------------|-------------------------------------|
| | AC | DC |
| M | 0/1, 5/7, 1/3 | 0, 0/1, 1, 1/1, 3, 3/1, 1/2, 0/2, 8 |
| S | 2/7, 4, 5, 19 | 1/3, 5/7, 6, 7 |
| Y | 1, 1/2, 0/2 | 4, 5, 2/7 |
| V | 6, 7, 8, 2/2 | 2/2 |
| T | 0, 1/1, 3, 3/1 | 19 |

9 SWITCHING TIMES (average values in msec)

| Valve | Switch-on AC | Switch-on DC | Switch-off AC | Switch-off DC |
|------------------------------|--------------|--------------|---------------|---------------|
| DKE / DKER + SP-666 / SP-667 | 40 | 60 | 25 | 35 |
| DKE / DKER + SP-669 | 60 | — | 90 | — |
| DKE-*/L* - DKER-*/L* | — | 75 ÷ 150 | — | 45 ÷ 150 |

Test conditions:

- 50 l/min; 150 bar
- nominal supply voltage
- 2 bar of back pressure on port T
- mineral oil ISO VG 46 at 50°C

The elasticity of the hydraulic circuit and the variations of the hydraulic characteristics and temperature affect the response time.

10 SWITCHING FREQUENCY

| Valve | AC (cycles/h) | DC (cycles/h) |
|------------------------------|---------------|---------------|
| DKE / DKER + SP-666 / SP-667 | 7200 | 15000 |

11 DEVICES FOR SWITCHING TIME CONTROL

These devices are only available for DC valve version (5 chambers body) and can control the switching time and therefore reduce the coil hammering in the hydraulic circuit. The different types are available shown in the figure.

The functionality of the device time control depends on the type of regulating element.

- **L**: controls and regulates the switching time in both moving directions of the spool: regulation is carried out by screwing/unscrewing the element itself (regulating choke);
- **L1/L2/L3**: controls the switching time in both moving directions of the spool by means of fixed calibrated restrictor (gauged flow)
 $\varnothing L1 = 1,25 \text{ mm}$; $\varnothing L2 = 1 \text{ mm}$; $\varnothing L3 = 0,75 \text{ mm}$;
- **LR**: controls and regulates the switching time in the B→A direction of the spool movement. The device does not control the switching time (standard time) in the opposite direction A→B of the spool movement.

For a correct operation of the switching time control, the passage in which the control device is installed must be completely filled with oil.

