


Explosion-proof solenoid valves

on/off and proportional controls - UL Standard

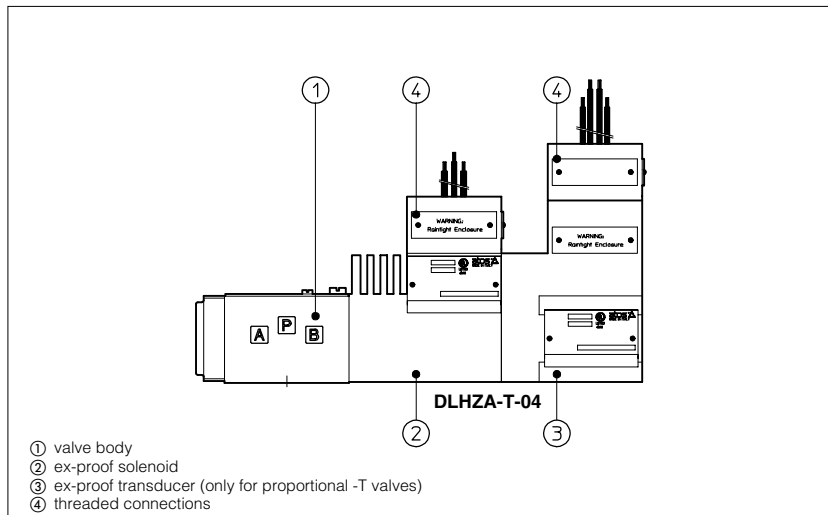

Explosion-proof on/off and proportional solenoids certified according to UL 1002 Standard, Class I, Groups C&D.

The solenoid case is designed to contain the possible explosion which could be caused by the presence of the gas mixture inside the housing, thus avoiding dangerous propagation in the external environment.

They are also designed to limit the external temperature according to the certified class to avoid the self ignition of the explosive mixture present in the environment.

These solenoids are applied to hydraulic valves for application in explosion-hazardous environments.

1 MODEL CODE OF ON/OFF DIRECTIONAL CONTROLS

DHA / **UL - 0 63 1/2** / * **NPT - *** **24DC** ** /*

DHA = spool type - direct
DLOH - DLOK = poppet type - leak free
DPHA = spool type - piloted

UL 1002 Certification

Valve size (ISO 4401) for all models excluded DLOH and DLOK

for DHA **0** = 06
 for DPHA **1** = 10
2 = 16
3 = 25

Valve configuration, see section 8

Spool type (only for DHA and DPHA), see section 8

Synthetic fluids:
WG = water-glycol
PE = phosphate ester

Design number

Supply voltage - see section 4

Certification type - only for DLOH and DLOK
AO-UL = UL 1002 Certification

Solenoid threaded connection:
NPT = 1/2" NPT ANSI B2.1 (tapered)

Options:

WP = prolonged manual override protected by metallic cap
A = solenoid at side of port B

Only for DLOH:

R = with check valve on port P

2 MODEL CODE OF PROPORTIONAL DIRECTIONAL CONTROLS

DLHZA / **UL - T - 0 40 - L 7 3** / **NPT** /* ** /*

DHZA = size 06 without sleeve, see tab. F160, F165
DLHZA = size 06 with sleeve, see tab. F180
DKZA = size 10 without sleeve, see tab. F160
DLKZA = size 10 with sleeve, see tab. F180
DPZA = size 16 and 25, see tab. F170, F172

UL 1002 Certification

A = for open loop application (not available for DL*ZA)
T = with integral transducer (not available for DPZA)

Valve size (ISO 4401):
0 = 06; **1** = 10; **2** = 16; **3** = 25

Valve configuration, see section 7

Regulation characteristic:

L = linear
S = progressive (not available for DL*ZA)
D = as S, but A and B flow path have ratio 1:2 (not available for DL*ZA)

Spool size, see technical tables: **3, 5** (for all models); **1, 7** (only for DL*ZA)

Fail safe configuration for DL*ZA **1** = A, B, P, T blocked **3** = P blocked; A, B, T tank connected

Synthetic fluids:
WG = water-glycol
PE = phosphate ester

Design number

Options:

WP = prolonged manual override protected by metallic cap (only for valves without transducer)

B = solenoid at side of port A

C = current feedback signal 4±20 mA

(only for -T version)

24 = with 24 Vdc coils instead of standard 12 Vdc coils

(only for -A version)

Only for DPZA:

G = pressure reducing valve for piloting

E = external pilot (through port X)

D = internal drain

Solenoid threaded connection:

NPT = 1/2" NPT ANSI B2.1 (tapered)


3 MAIN DATA OF EXPLOSION PROOF SOLENOIDS

Solenoid type	PROPORTIONAL	ON/OFF
Method of protection	EEx d	
Temperature class with +70°C ambient temp.	T4	T6
Surface temperature	≤ 135 °C	≤ 85 °C
Ambient temperature	-20 ÷ +70 °C	


4 MAIN DATA EXPLOSION PROOF SOLENOIDS

SOLENOID TYPE	PROPORTIONAL		ON-OFF
	without transducer	with transducer	
Solenoid code	OZA/UL-A	OZA/UL-T	OA/UL
Supply voltage	Vdc 12 DC, 24 DC	12 DC	12, 24, 110, 125, 220
	Vac 50/60 Hz	-	12, 24, 110/120, 220/240 (1)
Power consumption	35W		12W
Coil insulation	Class H		
Protection degree	IP 66		
Duty factor	100%		
Mechanical construction	Explosion proof safety case classified according to UL 1002, Class I, Groups C&D		
Cable entrance and electrical wiring	The solenoids are provided with 1/2 NPT (ANSI B2.1) threaded connections. The cable-gland, to be provided by the customer, must be applied to such connections.		



OA/UL-AC

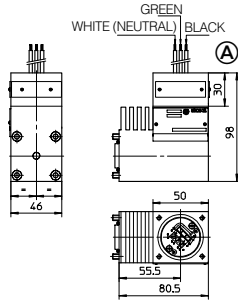


**OA/UL-DC
OZA/UL-A**

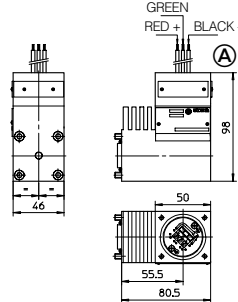

OZA/UL-T

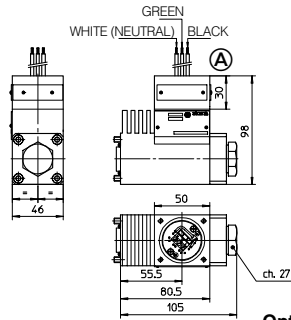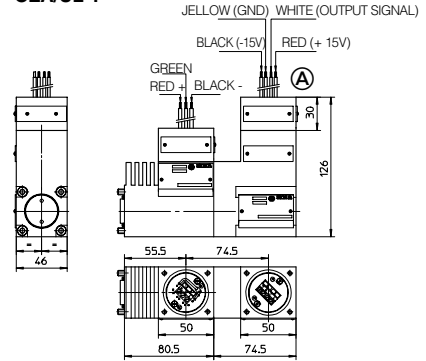

Option /WP

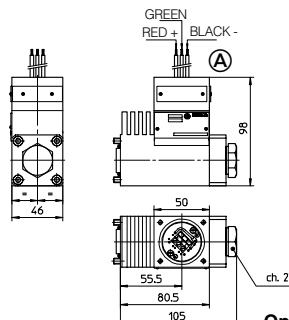

Option /WP

(1) For alternating current supply a rectifier bridge is provided built-in the solenoid

Ⓐ = The valves are supplied with 1,07 m (42 inches) cable length, factory wired.

5 MODEL CODE OF MECHANICAL PRESSURE CONTROLS

AGAM - **20 / 2** **0 / 210** **NPT** - * **24 DC** ** /*

AGAM = pressure relief valve: subplate mounting, see tab. C066
ARAM = pressure relief valve: threaded connections, see tab. C045
 Valve size for AGAM: **10** (ISO 6264), **20** (ISO 6264), **32** (ISO 6264)
 for ARAM: **20** = G 3/4", **32** = G 1 1/4"

Number of the different setting pressure values (1, 2, 3)

Valve configuration
0 = venting with de-energized solenoid
1 = venting with energized solenoid
2 = without venting

Pressure range of first/second/third setting:
100 = 10 - 100 bar; **210** = 10 - 210 bar; **350** = 10 - 350 bar

Synthetic fluids:
WG = water-glycol
PE = phosphate ester

Design number

Supply voltage, see section 4

Certification type
AO/UL = UL 1002 certification

Solenoid threaded connection:
NPT = 1/2" NPT ANSI B2.1 (tapered)

6 MODEL CODE OF COVERS FOR CARTRIDGE VALVES

LIDEW - **1 / *** **NPT** - * **24DC** ** /*

Cover type:
LIDBH* = with solenoid valve and shuttle valve for pilot selection
LIDEW* = with solenoid valve for pilot selection
 * = valve configuration, see tab. H030, section 2

Cover size (ISO 7368)
 for LIDBH*: **1** = 16... **5** = 50
 for LIDEW* **1** = 16... **8** = 80

Options:
E = external attachments X (1/4"GAS) and underneath port X supplied plugged
******* = restrictors different from standard ones, see tab. H030

Synthetic fluids:
WG = water-glycol
PE = phosphate ester

Design number


Supply voltage - see section 4

Certification type
AO-UL = UL 1002 certification

Solenoid threaded connection:
NPT = 1/2" NPT ANSI B2.1 (tapered)

Note: for the code of the ISO cartridge to use with the above covers see tab. H003, section 2 and tab. H030, section 3.

7 HYDRAULIC CONFIGURATIONS OF DIRECTIONAL PROPORTIONAL CONTROLS

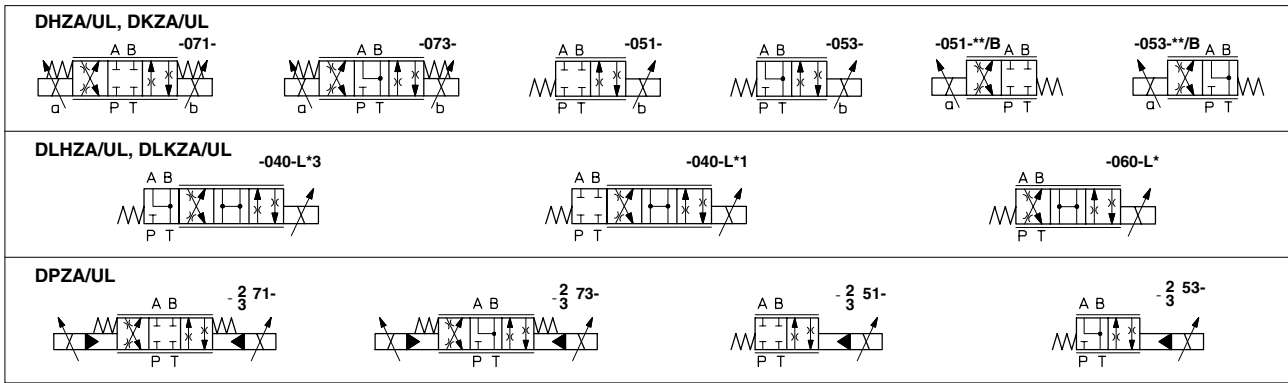


8 HYDRAULIC CONFIGURATIONS OF DIRECTIONAL ON/OFF CONTROLS

For the valve hydraulic configuration and the spool type, see:

DHA/UL Table E010, sections 2 and 3; **DLOH* / DLOK*** Table E041, section 2;
DPHA/UL Table E080, sections 2 and 3; **LIDBH* / LIDEW*** Table H030, section 2.

9 Q/Δp DIAGRAMS OF ON/OFF DIRECTIONAL CONTROLS (based on mineral oil ISO VG 46 at 50°C)



Flow direction \ Spool type	Flow direction				
	P → A	P → B	A → T	B → T	P → T
0	C	C	C	C	
0/2, 1, 1/2	A	A	A	A	
3	A	A	C	C	
4, 5	D	D	D	D	A
6	A	A	C	A	
7	A	A	A	C	
8	C	C	B	B	

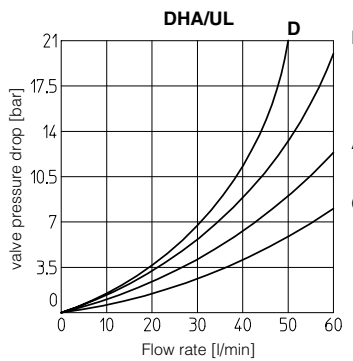

INTERNAL LEAKAGE of DLOH and DLOK (based on mineral oil ISO VG 46 at 50°C): less than 5 drops/min (0,36 cm³/min) at max pressure.


Flow direction \ Valve type	Flow direction	
	P → A (1) (P → B)	A → T (B → T)
DLOH-2A	B	-
DLOH-2C	C	-
DLOH-3A	D	C
DLOH-3C	C	A
DLOK-3A	G	F
DLOK-3C	F	E

(1) For two-way valves pressure drop refers to P → T

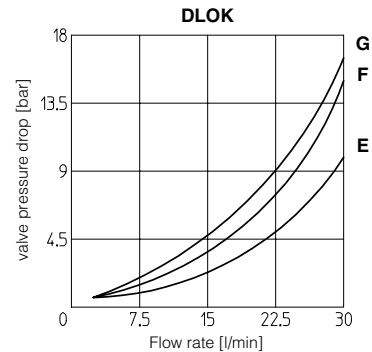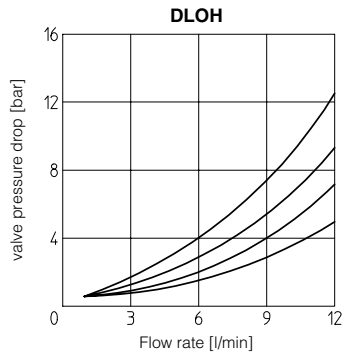


10 OPERATING LIMITS OF ON/OFF DIRECTIONAL CONTROLS (based on mineral oil ISO VG 46 at 50°C)


The diagram have been obtained with warm solenoids and power supply at lowest value (V_{nom}-10%). For DHA valves the curves refer to application with symmetrical flow through the valve (i.e. P → A and B → T). In case of asymmetric flow the operating limits must be reduced.

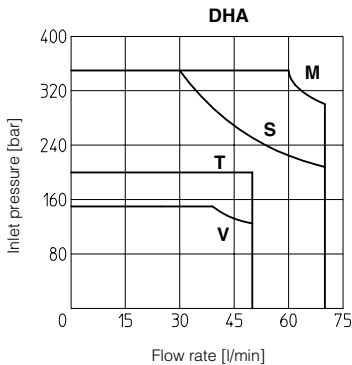

M = Spools 0, 1, 8; **T** = Spools 0/2, 1/2;
S = Spools 3, 6, 7; **V** = Spools 4, 5.

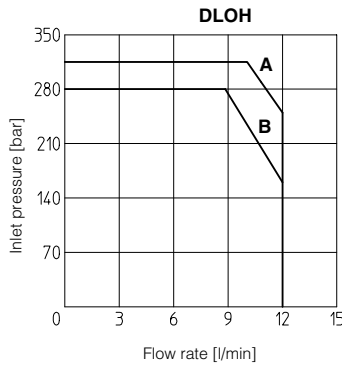

A = DLOH-3A;
B = DLOH-2A, DLOH-3C.

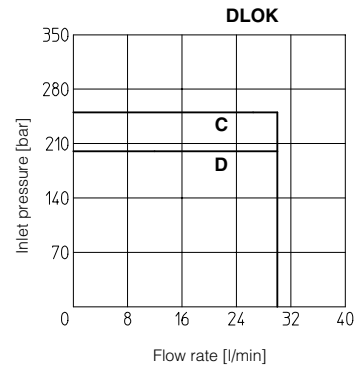

C = DLOK-3A;
D = DLOK-3C.

11 OPERATING LIMITS OF PROPORTIONAL DIRECTIONAL CONTROLS

Valve type	DHZA-A, -T	DLHZA-T	DKZA-A, -T	DLKZA-T	DPZA-A-2	DPZA-A-3
Flow max	60	40	110	80	350	600
Δp max [bar]	50	70	40	60	40	40
Pressure max	P-A-B [bar]	350	350	315	315	350
	T [bar]	210	210	210	210	210

12 MODEL CODE OF PROPORTIONAL PRESSURE CONTROLS

RZMA / UL - A - 010 / 250 / NPT / * ** /*

Pressure relief:
RZMA = see tab. F007
HZMA = see tab. F065
AGMZA = see tab. F035
LIMZA = see tab. F300

Pressure compensator:
LICZA = see tab. F300

Pressure reducing:
RZGA = see tab. F015
HZGA = see tab. F070
KZGA = see tab. F070
AGRCZA = see tab. F050
LIRZA = see tab. F300

UL 1002 certification

A = for open loop application

For RZMA e RZGA: **010** = size 06 (ISO 4401) For RZMA/HZMA: **030** = size 06 (ISO 4401)
 For RZGA: **033** = size 06 (ISO 4401) For HZGA: **031** = size 06 (ISO 4401)
 For AGMZA: **10** = size 10 (ISO 6264), **20** = size 20 (ISO 6264), **32** = size 32 (ISO 6264)
 For AGRCZA: **10** = size 10 (ISO 5781), **20** = size 20 (ISO 5781)
 For LIMZA, LICZA, LIRZA (ISO 7638): **16, 25, 32** (all models)
40 ; 50 (only LIMZA and LICZA)
63 (only LIMZA)

Synthetic fluids:
WG = water-glycol
PE = phosphate ester

Design number

Options:
E = external pilot (only for AGMZA)
P = with integral mechanical pressure limiter (only for AGRCZA and LIRZA)
R = with check valve (only for AGRCZA)
24 = with 24 Vdc coils instead of standard 12 Vdc coils

Solenoid threaded connection:
NPT = 1/2" NPT ANSI B2.1 (tapered)

Max pressure:
32 = 32 bar (only for RZGA-A-010)
80 = 80 bar
100 = 100 bar (only for RZGA-A-010)
210 = 210 bar (only for RZGA-A-010)
180 = 180 bar
250 = 250 bar

13 MODEL CODE OF PROPORTIONAL FLOW CONTROLS

QVHZA / UL - T - 06 / 12 / NPT / * ** /*

Pressure compensated, flow control valve:
QVHZA = see tab. F410
QVKZA = see tab. F410

UL 1002 certification

A = for open or closed loop application
T = with integral spool position transducer

Valve size (ISO 4401)
 QVHZA: **06** QVKZA: **10**

Max regulated flow:
 QVHZA QVKZA
3 = 3,5 l/min; **65** = 65 l/min
12 = 12 l/min; **90** = 90 l/min
18 = 18 l/min;
36 = 36 l/min;

Synthetic fluids:
WG = water-glycol
PE = phosphate ester

Design number

Options:
WP = prolonged manual override protected by metallic cap (only for valves without transducer)
C = current feedback signal 4±20 mA (only for -T versions)
24 = with 24 Vdc coils instead of standard 12 Vdc coils (only for -A version)

Solenoid threaded connection:
NPT = 1/2" NPT ANSI B2.1 (tapered)

14 EXTERNAL PROFILE OF EX-PROOF VALVES

