




HANSA-TMP
MANUFACTURING YOUR SUCCESS

HT 16 / M / 783 / 0621 / E

THE PRODUCTION LINE OF HANSA-TMP

**Variable Displacement Axial Piston Motor
for Open and Closed Loop System**

TMV 550

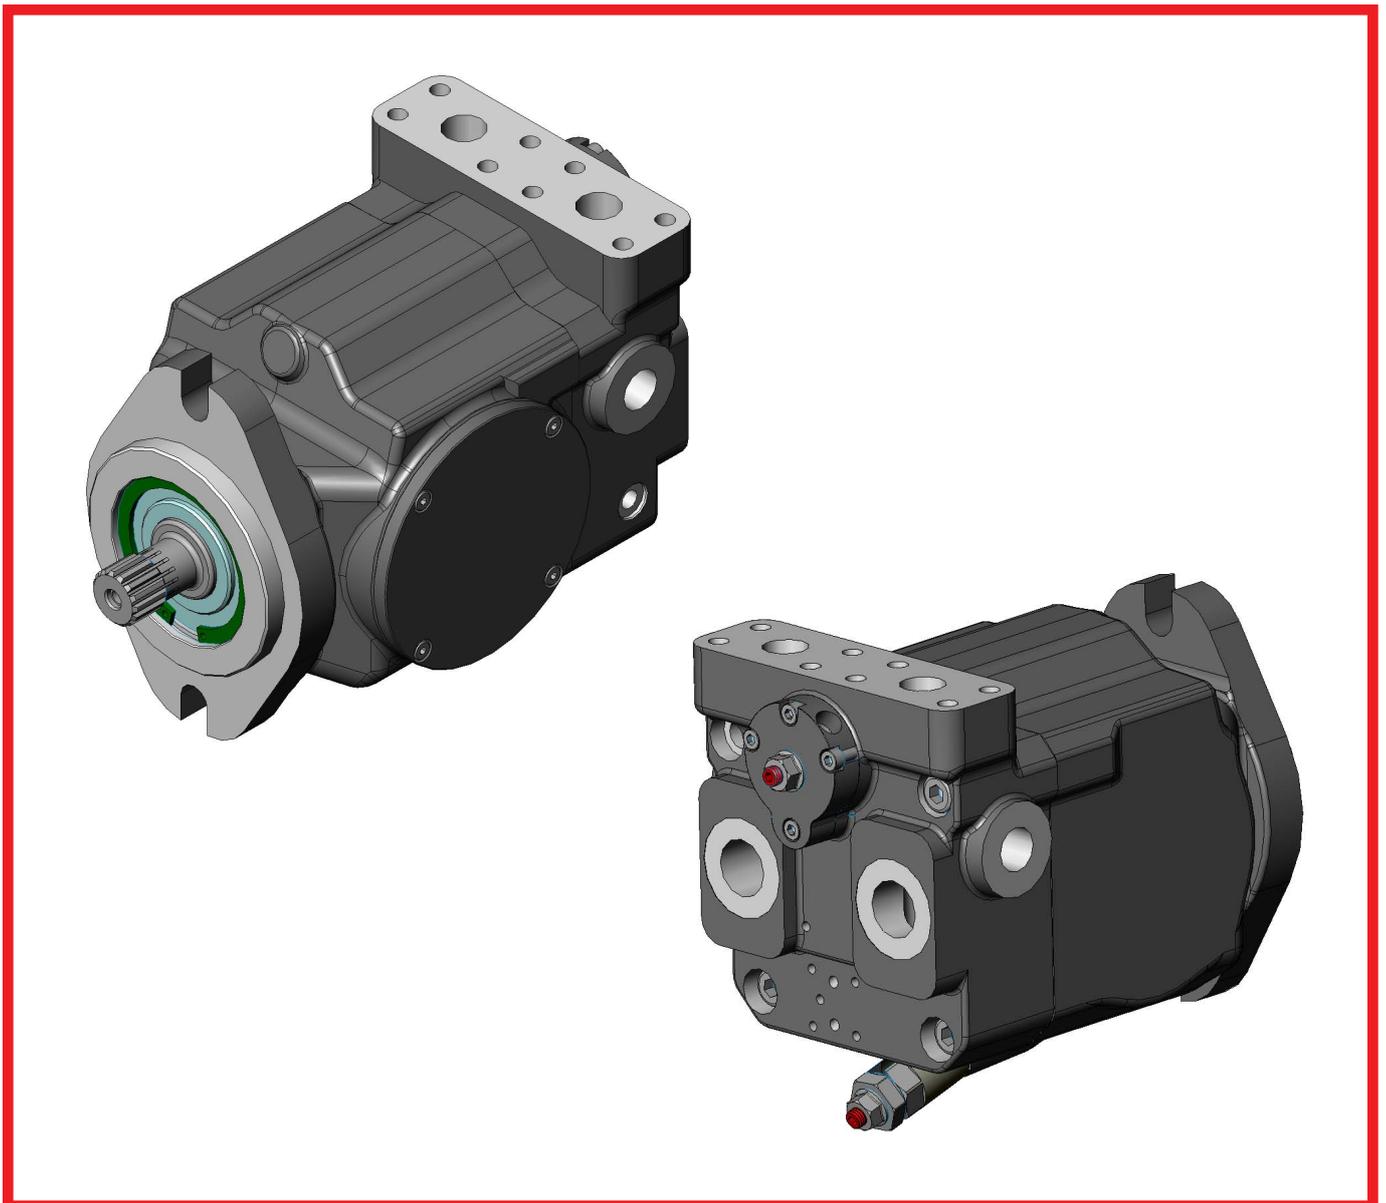

CONTENTS

General Information.....	4
Technical Specifications.....	5
Installation Drawings.....	6 - 7
Shaft Details.....	8
Accessories.....	9
Order Code.....	10

GENERAL INFORMATION

Product Description

The variable-displacement axial piston motors have been designed to work both in an open and closed circuit. Control systems actually available are making easy to use these motors in any applications for industrial and mobile field.

Available control systems are: 12V Electrical Control
24V Electrical Control
Remote Hydraulic Servo-Control

The variable-displacement axial piston motors TMV 550 with swash plate system may operate in either closed or open circuit.

Proper selection of materials and the use of steel cylinder blocks with inserted bushings guarantee the high performance of the TMV 550 motors, in terms of max. speed and working pressure.

Characteristics

- Exceptionally high power/weight ratio
- Excellent volumetric and mechanical efficiency
- Long life
- Compact design
- Purge valve fitted as optional (All dimensions remain unchanged)

The very small dimensions allow to fit the motor in restricted space or positions which are difficult with traditional mechanical transmission.

Installation Instructions

- During the assembly check that the motor is in line and concentric with the drive shaft sleeve to prevent overloading of the shaft bearings.
- Clean carefully all tanks and pipes internally before assembly.
- The pipe internal diameter must be suitable for the max. oil speed through the pipes.
- Fit the motor lower than oil level in tank.
- Heat exchanger must be provided in the machine design, to keep temperature level within the limit of 80°C.



First Starting

- Before starting fill all the system components with new and filtered oil.
- Verify that the charge pressure is correct.
- Restore the tank oil level.

Maintenance

To guarantee long life, the motor must work with oil cleaned according ISO 4406 class 18/16/13 ISO 4406 (NAS 9) or better.

- First oil change must be made after approximately 500 hours of operations, and then every 2000 hours.
- The filter cartridge must be replaced the first time after 50 hours and then every 500 hours; such time should be reduced when the filter clogging indicator shows that the cartridge is clogged or when the system works in a heavily polluted environment.



TECHNICAL SPECIFICATIONS

Motor Model			TMV 46XX/23	TMV 50XX/25	TMV64XX/32
Max. displacement	$V_{max.}$	cm ³ /min.	46	50	64
Min. displacement	$V_{min.}$	cm ³ /min.	23	25	32
Max. theoretic specific torque	M	Nm/bar	0,73	0,79	1,02
Flow rating ⁽¹⁾	Q	l/min.	165	180	230
Power rating ⁽²⁾	W	kW	78,5	85,9	109,8
Continuous pressure	$P_{nom.}$	bar		300	
Peak pressure	$P_{max.}$	bar		400	
Max. case pressure	P_{case}	bar		2	
Polar moment of inertia	J	Nm/sec ²	60x10 ⁻¹	60x10 ⁻¹	59x10 ⁻¹
Minimum speed	$n_{min.}$	n/min.		700	
Max. cont. speed with load	$n_{max-cont.}$	n/min.		3.600	
Max. speed without load	$n_{max-int.}$	n/min.		4.000	
Fluid max. temperature	T	°C		80	
Fluid viscosity	ν	mm ² /sec.		15 - 60	
Fluid contamination			18/16/13 according ISO 4406 (NAS 8)		
Mass ⁽³⁾	m	kg	20	20	20
Mounting flange				SAE B	

Notes:

(1) $[V_{max.} \times n_{max.}]$

(2) $V_{max.}$ at 3600 n/min. at 300 bar

(3) Approximate values, can change depending on different regulator


(4) The motor 46, 50 and 64 use the same external housing

Peak operations must not exceed 1% of every minute.

A simultaneous max. pressure and speed are not recommended.

INSTALLATION DRAWING

**Remote Hydraulic Servo-Control
Rear A e B Connection**

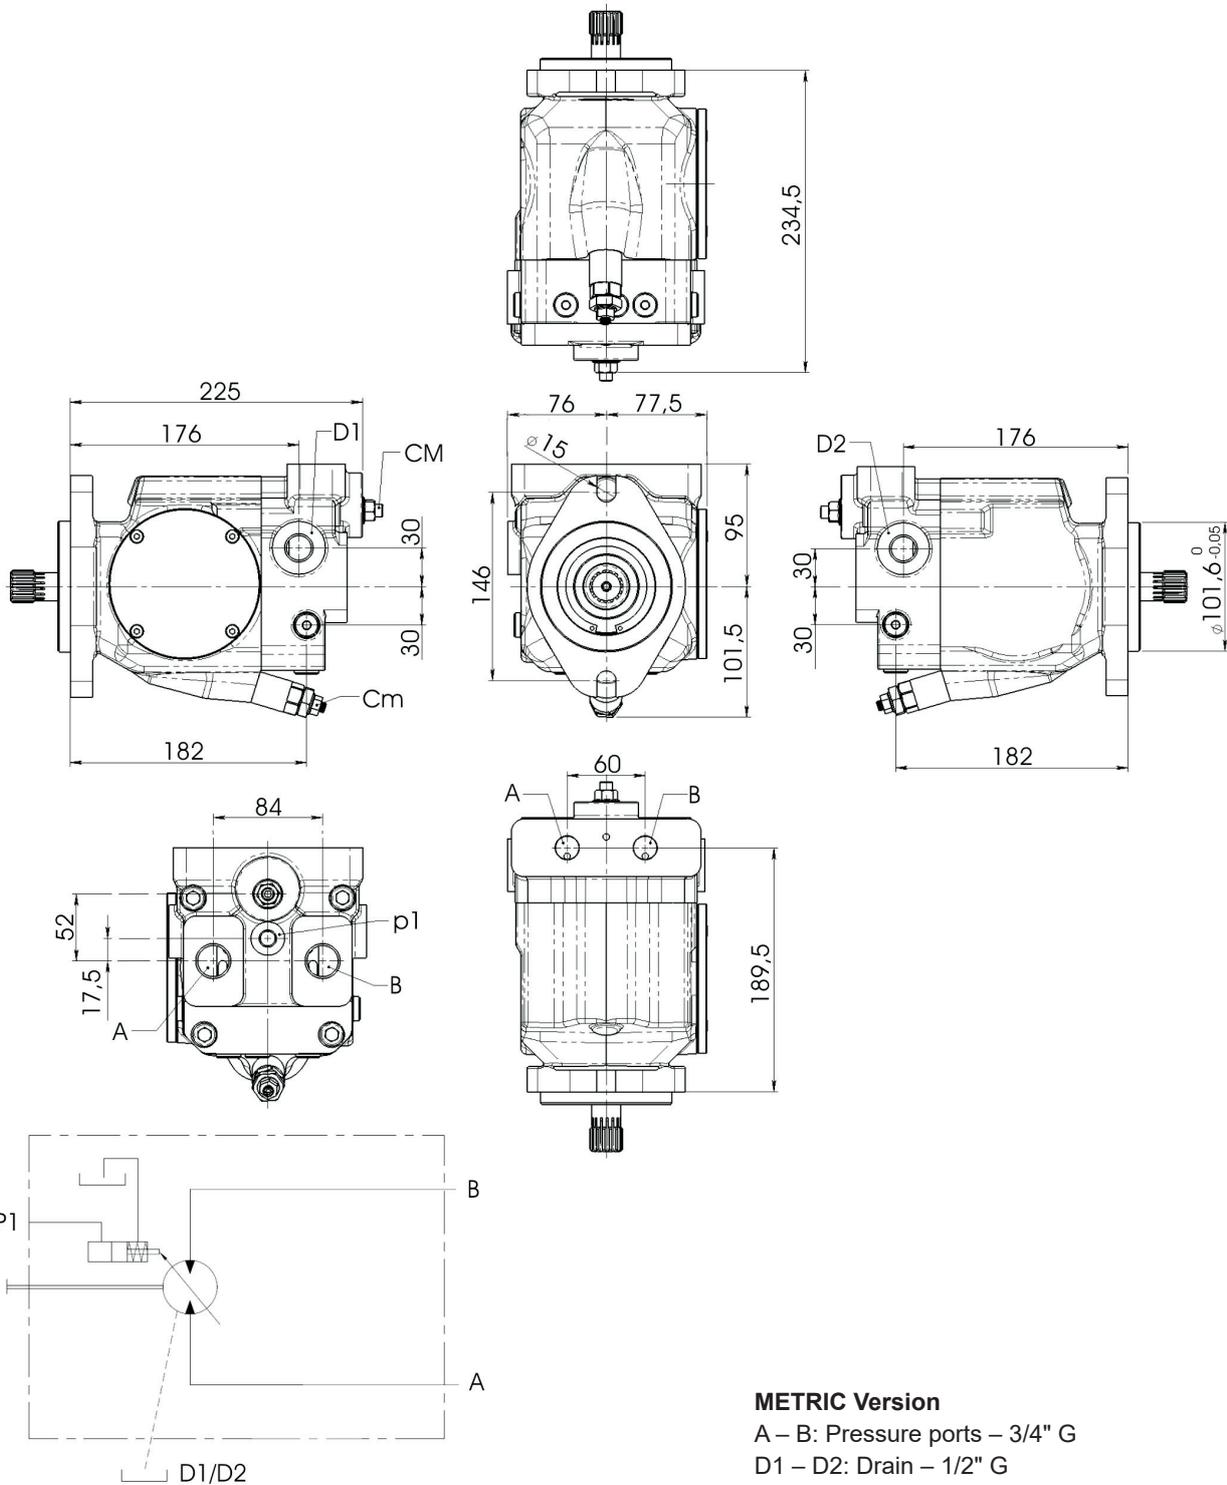


METRIC Version

- A – B: Pressure ports – 3/4" G
- D1 – D2: Drain – 1/2" G
- CM: Maximum stroke limiter
- Cm: Minimum stroke limiter
- P1: Pilote pressure -1/4" G

INSTALLATION DRAWING

Electrical Control Rear A e B Connection

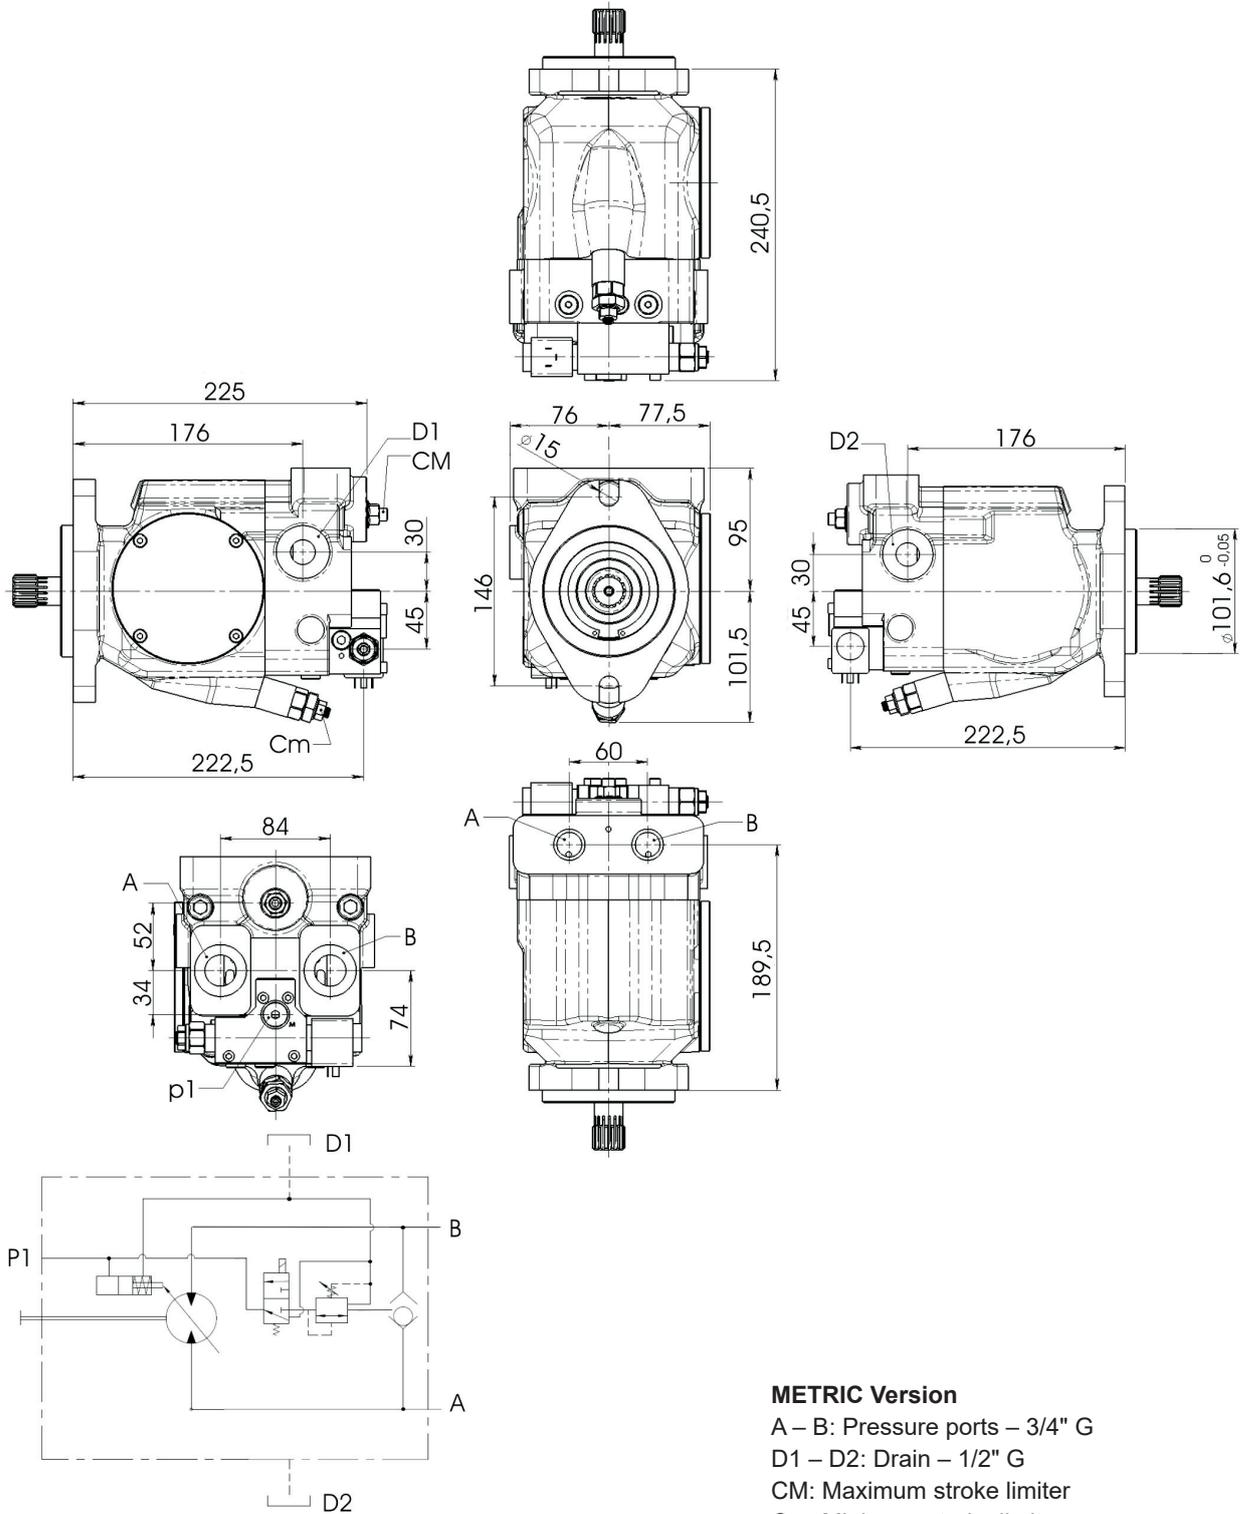

METRIC Version

A – B: Pressure ports – 3/4" G

D1 – D2: Drain – 1/2" G


CM: Maximum stroke limiter

Cm: Minimum stroke limiter


P1: Pilote pressure – 1/4" G

SHAFTS

Type 3 - Male Splined 15T DP 16/32

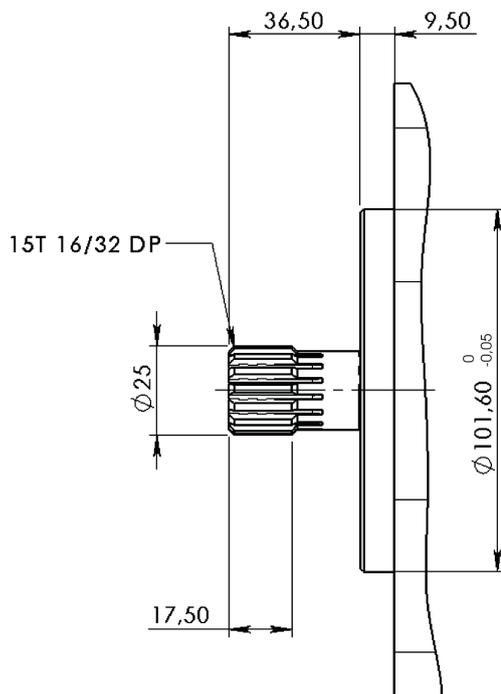


Type 5 - Male Splined 13T DP 16/32

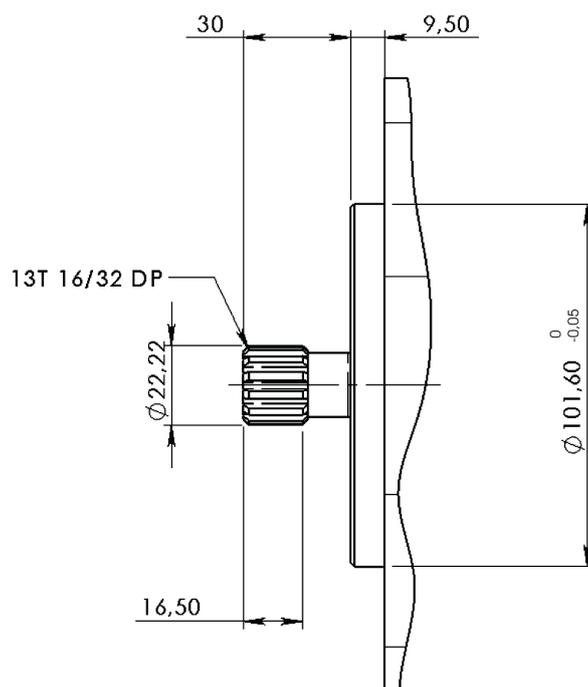

ACCESSORIES

Purge Valve

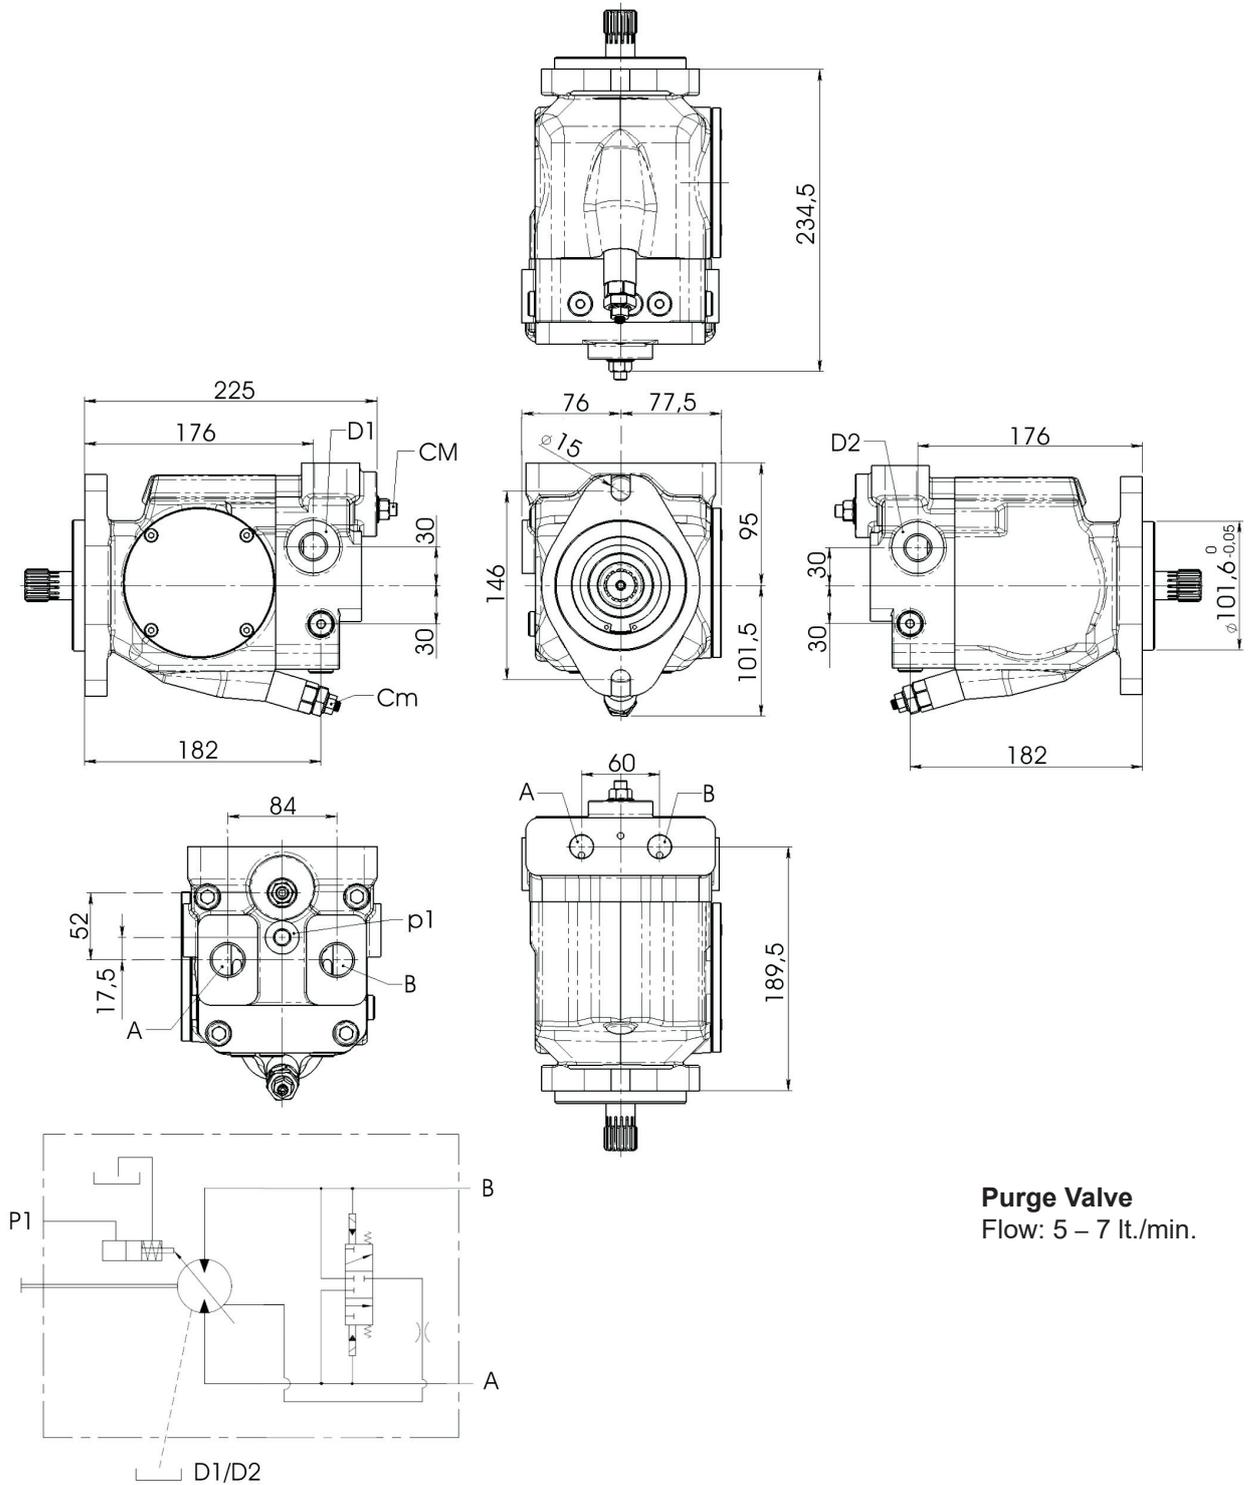

Purge Valve
Flow: 5 – 7 lt./min.

ORDER CODE

TMV 550	46 XX 23	ID	1	B	3	T	V	-
1	2	3	4	5	6	7	8	9

Pag.

1 - Motor Series

TMV 550 = Variable displacement axial piston motor TMV 550 Series

2 - Motor Displacement (max/min.)

46XX/23 = 46 / 23 cm³/n

50XX/25 = 50 / 25 cm³/n

64XX/32 = 64 / 32 cm³/n

5

3 - Controls

ID = Remote hydraulic servo-control

E1 = Electric 12V

E2 = Electric 24V

6

7

7

4 - Ports

1 = Rear A and B connection

2 = Coupled sideways A and B connection

6 - 7

6 - 7

5 - Rotation Direction

B = Bidirectional (standard)

6 - Shafts

3 = Splined male 15 teeth 16/32 DP

5 = Splined male 13 teeth 16/32 DP

8

7 - Port Versions

U = SAE (UNF thread)

T = A and B ports thread - 3/4" BSPP

8 - Optional (omit if not requested)

- = Without optional

V = Purge valve

9 - Special Versions (omit if not requested)

PUMPS



Closed Loop Axial Piston Pumps (Variable Displacement) - 6-110 cc

Model	Displacement cm ³ /n.	Rated Pressure MPa	Peak Pressure MPa	Maximum speed n/min.	Weight kg (single pump)
TPV 1100 TPV 1300	6, 8, 9, 11, 12, 13	30	35	3.600	8,8
	15, 17		30		
	18		30		
	19, 21	22	28	3.200	
TPV-TPVTC 1500	17, 18, 19, 21	35	40	3.600	14
TPV 3200	21, 28	25	35		22
TPV-TPVT 3600	26, 28, 30, 31, 32, 34, 36, 38	40	45		28
TPV 4300	32, 38, 45, 50	28	35		23
TPV 5000	46, 50, 64	30	40		29
TPV 9000	55	40	45		4.000
	72			4.100	68
	90			4.000	
	110			3.800	



Open Loop Axial Piston Pumps (Fixed Displacement) - 32-50 cc

Model	Displacement cm ³ /n.	Rated Pressure MPa	Peak Pressure MPa	Maximum speed n/min.	Weight kg (single pump)
TPF 60	35, 40, 46	35	42	2.800	20,5
	50		41	2.500	



Bent Axis Pumps - 12-130 cc

Model	Displacement cm ³ /n.	Rated Pressure MPa	Peak Pressure MPa	Maximum speed n/min.	Weight kg
TPB - TAP 70	12.6	35	40	3.300	7,5
	17.0			3.200	
	25.4			2.550	8,5
	34.2			2.250	
	41.2, 47.1			2.200	15,5
	56.0			2.100	
	63.6			2.050	
	83.6, 90.7, 108.0			1.700	27,0
	130.0			1.600	29,5

The table values can change in function of the configuration.

As HANSA-TMP has a very extensive range of products and some products have a variety of applications, the information supplied may often only apply to specific situations.

If the catalogue does not supply all the information required, please contact HANSA-TMP.

In order to provide a comprehensive reply to queries we may require specific data regarding the proposed application.

Whilst every reasonable endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied.

HANSA-TMP reserves the right to amend specifications at their discretion.



HANSA-TMP S.r.l.
Via M. L. King, 6 – 41122 Modena (ITALY)
Tel.: +39 059 415 711
Fax: +39 059 415 730
E-mail: hansatmp@hansatmp.it
Website: www.hansatmp.it

Certified Company
ISO 9001:2015 – ISO 14001:2015



Share Capital: € 300.000,00
VAT Number: IT01167360369
REA Number: MO-225785